

# Techzero



SLIDING SOLUTION WITHOUT DOORPOSTS





Scigno further expands its product range for construction sites by presenting Techzero, the new counter-frame for sliding doors without doorposts.


Based on the Scrignotech technology, Techzero introduces a new concept of product and installation, specifically intended for professional users.

The aluminium profile bars allow an impeccable installation, preventing flaws and rifts.


Techzero is available both for plasterwork and plasterboard, in the main wall thicknesses.

The sliding system has a 10-year warranty and can guarantee a total capacity of 100 kg.

PLASTERWORK

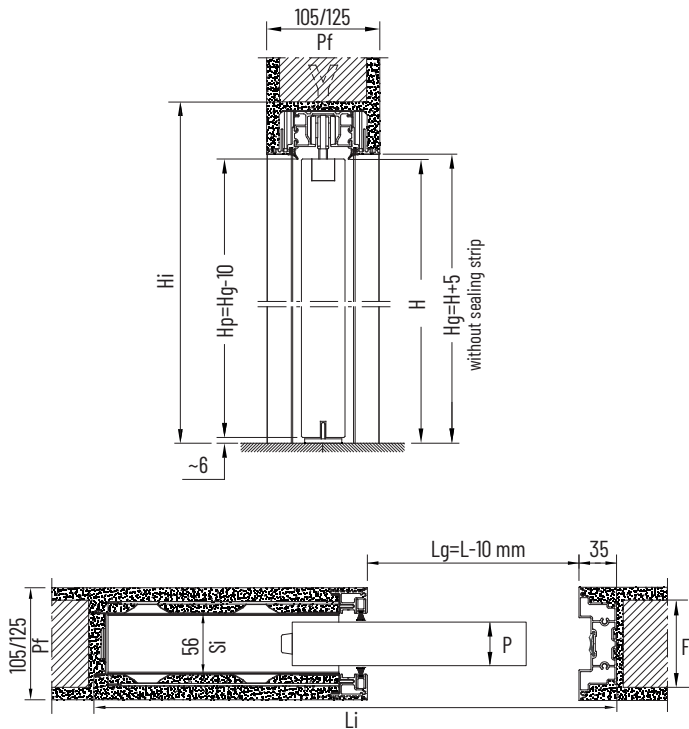

PLASTERBOARD

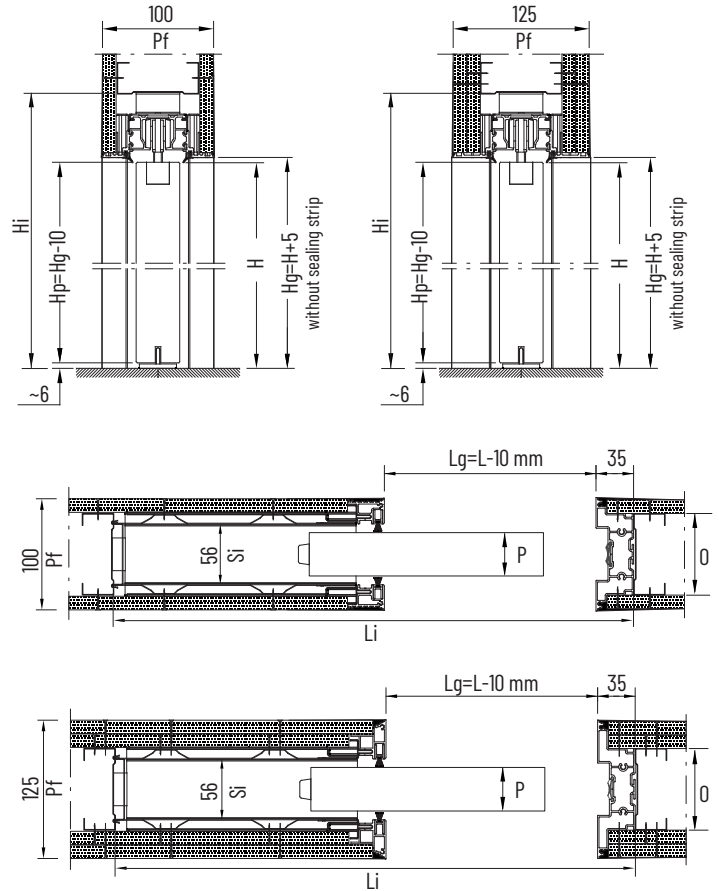

HEIGHT 2100

nominal clear opening size mm		effective opening size mm		overall dimension mm		door size mm		finished wall mm	support wall thickness mm	internal space mm	max door thickness mm
L	H	Lg	Hg	Li	Hi	Lp	Hp	Pf	F/O	Si	P
600	2100	590	2105	1280	2170	615	Hg*-10 mm	105pw	brick 80	56	40
700		690		1480		715		125pw			
800		790		1680		815		100pb			
900		890		1880		915		125pb - 2s (double sheet)			
1000		990		2080		1015					

\* Height measured from the crosspiece without sealing strip to the finished floor (if the counter-frame is installed at finished floor level: Hg\* = Hg)

HEIGHT 2400

nominal clear opening size mm		effective opening size mm		overall dimension mm		door size mm		finished wall mm	support wall thickness mm	internal space mm	max door thickness mm
L	H	Lg	Hg	Li	Hi	Lp	Hp	Pf	F/O	Si	P
600	2400	590	2405	1280	2470	615	Hg*-10 mm	105pw	brick 80	56	40
700		690		1480		715		125pw			
800		790		1680		815		125pb - 2s (double sheet)			
900		890		1880		915					
1000		990		2080		1015					

\* Height measured from the crosspiece without sealing strip to the finished floor (if the counter-frame is installed at finished floor level: Hg\* = Hg)



[www.scrigno.net](http://www.scrigno.net)