
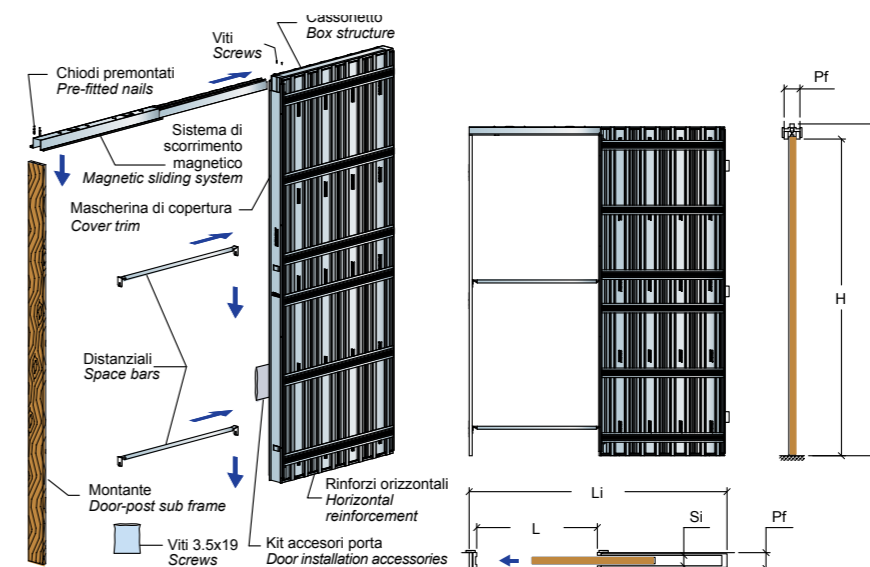
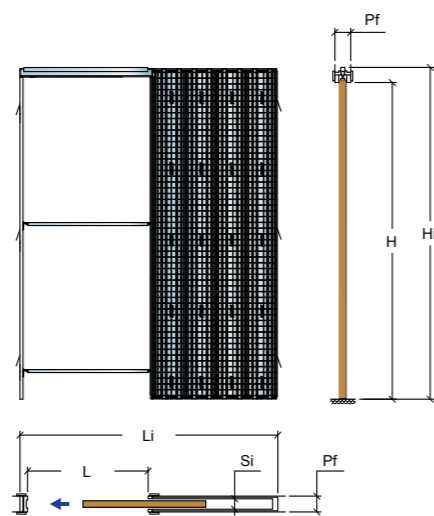


MAGNIFICO

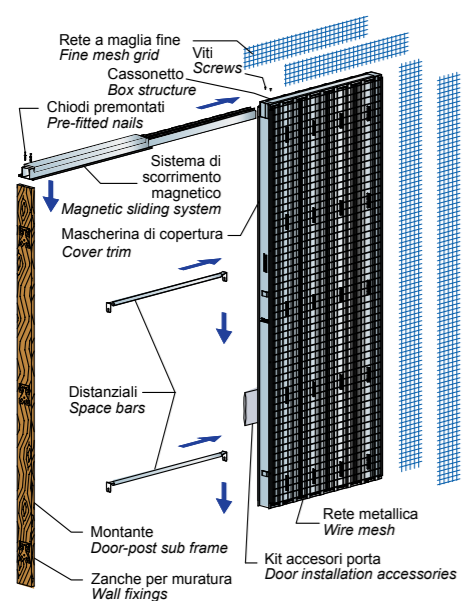

FINO A 25 KG UP TO 25 KG LOAD CAPACITY

LUCE DI PASSAGGIO CLEAR OPENING SIZE		MISURA D'INGOMBRO STRUCTURAL OPENING SIZE		PARETE FINITA/ SEDE INTERNA FINISHED WALL/ INTERNAL SPACE	DIMENSIONI ANTA DOOR DIMENSIONS		SPESSORE PARETE DI SUPPORTO BRICK/STUD THICKNESS	SPESSORE ANTA DOOR THICKNESS
L	H	Li	Hi	Pf / Si	Lp	Hp	F	P
600	2000 2100	1310	2120 2220	105/69 125/89 145/89	630	2010 2110	80 100 120	43 43 43
700		1510			730			
800		1710			830			
900		1910			930			
1000		2110			1030			

Portata: 25 kg
Load Capacity: 25 kg

Apertura e chiusura rallentate di serie
Soft opening and closure included

FINO A 25 KG UP TO 25 KG LOAD CAPACITY

LUCE DI PASSAGGIO CLEAR OPENING SIZE		MISURA D'INGOMBRO STRUCTURAL OPENING SIZE		PARETE FINITA/ SEDE INTERNA FINISHED WALL/ INTERNAL SPACE	DIMENSIONI ANTA DOOR DIMENSIONS		SPESSORE PARETE DI SUPPORTO BRICK/STUD THICKNESS	SPESSORE ANTA DOOR THICKNESS
L	H	Li	Hi	Pf / Si	Lp	Hp	F	P
600	2000 2100	1310	2120 2220	100/54 125/69	630	2010 2110	75 100	40 43
700		1510			730			
800		1710			830			
900		1910			930			
1000		2110			1030			

Portata: 25 kg
Load Capacity: 25 kg

Apertura e chiusura rallentate di serie
Soft opening and closure included

FINO A 40 KG UP TO 40 KG LOAD CAPACITY

LUCE DI PASSAGGIO CLEAR OPENING SIZE		MISURA D'INGOMBRO STRUCTURAL OPENING SIZE		PARETE FINITA/ SEDE INTERNA FINISHED WALL/ INTERNAL SPACE	DIMENSIONI ANTA DOOR DIMENSIONS		SPESSORE PARETE DI SUPPORTO BRICK/STUD THICKNESS	SPESSORE ANTA DOOR THICKNESS
L	H	Li	Hi	Pf / Si	Lp	Hp	F	P
600	1800 ÷ 2400	1310	1920 ÷ 2520	105/69 125/89 145/89	630	1810 ÷ 2410	80 100 120	43 43 43
700		1510			730			
800		1710			830			
900		1910			930			

Portata: 40 kg
Load Capacity: 40 kg

Apertura e chiusura rallentate di serie
Soft opening and closure included

FINO A 40 KG UP TO 40 KG LOAD CAPACITY

LUCE DI PASSAGGIO CLEAR OPENING SIZE		MISURA D'INGOMBRO STRUCTURAL OPENING SIZE		PARETE FINITA/ SEDE INTERNA FINISHED WALL/ INTERNAL SPACE	DIMENSIONI ANTA DOOR DIMENSIONS		SPESSORE PARETE DI SUPPORTO BRICK/STUD THICKNESS	SPESSORE ANTA DOOR THICKNESS
L	H	Li	Hi	Pf / Si	Lp	Hp	F	P
600	1800 ÷ 2400	1310	1920 ÷ 2520	105/54 125/69	630	1810 ÷ 2410	75 100	40 43
700		1510			730			
800		1710			830			
900		1910			930			

Portata: 40 kg
Load Capacity: 40 kg

Apertura e chiusura rallentate di serie
Soft opening and closure included