
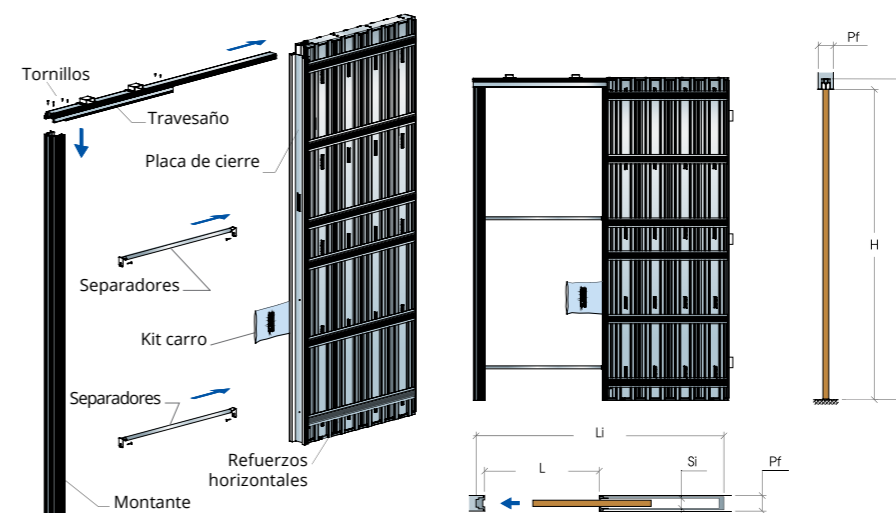


ESSENTIAL SIMPLE

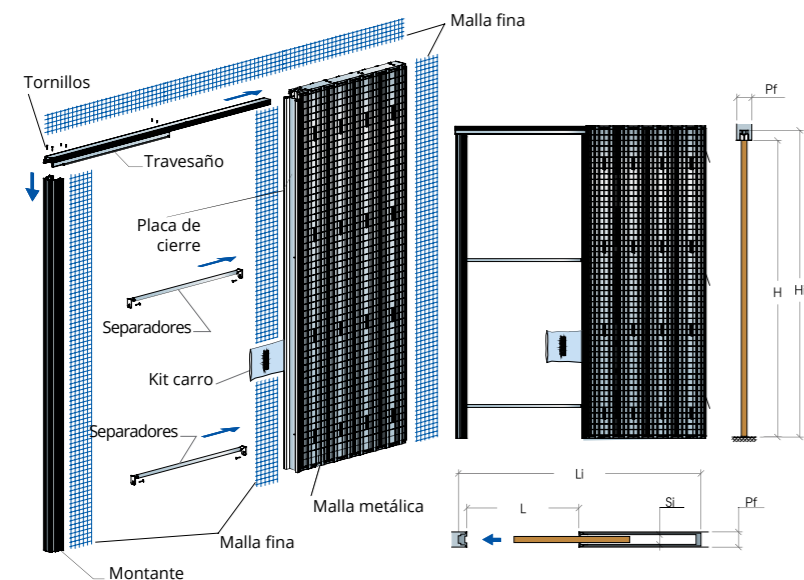

ESTÁNDAR

Leyenda	LUZ DE PASO		MEDIDA TOTAL		PARED ACABADA/ HUECO INTERIOR
	L	H	Li	Hi	Pf / Si
L = Ancho luz	600	2000/2100	1320	2065/2165	105/69 - 125/89
H = Altura luz	700		1520		105/69
Li = Ancho total	750		1620		105/69
Hi = Altura total	800		1720		105/69 - 125/89
Pf = Pared acabada	900		1920		105/69 - 125/89
Si = Huevo interior	1000		2120		105/69 - 125/89
	1100		2320		105/69 - 125/89
	1200		2520		105/69 - 125/89

ESTÁNDAR

Leyenda	LUZ DE PASO		MEDIDA TOTAL		PARED ACABADA/ HUECO INTERIOR
	L	H	Li	Hi	Pf / Si
L = Ancho luz	600	2000/2100	1320	2065/2165	100/54 - 125/69
H = Altura luz	700		1520		125/69
Li = Ancho total	750		1620		100/54 - 125/69
Hi = Altura total	800		1720		100/54 - 125/69
Pf = Pared acabada	900		1920		100/54 - 125/69
Si = Huevo interior	1000		2120		100/54 - 125/69
	1100		2320		100/54 - 125/69
	1200		2520		125/69

MEDIDAS ESPECIALES

LUZ DE PASO		MEDIDA TOTAL		PARED ACABADA/ HUECO INTERIOR	LUZ DE PASO		MEDIDA TOTAL		PARED ACABADA/ HUECO INTERIOR
L	H	Li	Hi	Pf / Si	L	H	Li	Hi	Pf / Si
600	800-1990	1320	865-2055	105/69	600	800-1990	1320	865-2055	125/89
700		1520			700		1520		
800		1720			800		1720		
900		1920			900		1920		
1000		2120			1000		2120		
1100		2320			1100		2320		
1200		2520			1200		2520		

Antes de encargar la puerta para el premarco Essential hay que comprobar en la obra la medida real de la luz de paso. Se debe medir después de instalar el premarco.

La anchura de paso real se reduce en 10 mm.

MEDIDAS ESPECIALES

LUZ DE PASO		MEDIDA TOTAL		PARED ACABADA/ HUECO INTERIOR	LUZ DE PASO		MEDIDA TOTAL		PARED ACABADA/ HUECO INTERIOR
L	H	Li	Hi	Pf / Si	L	H	Li	Hi	Pf / Si
600	800-1990	1320	865-2055	100/54	600	800-1990	1320	865-2055	125/69
700		1520			700		1520		
800		1720			800		1720		
900		1920			900		1920		
1000		2120			1000		2120		
1100		2320			1100		2320		
1200		2520			1200		2520		

Antes de encargar la puerta para el premarco Essential hay que comprobar en la obra la medida real de la luz de paso. Se debe medir después de instalar el premarco.

La anchura de paso real se reduce en 10 mm.